EverydaySafe™

MAIN FEATURES

App connectivity & user management
Yes

Protection
Burglary resistance – built to a certified EN 14450 construction – S1 level, Faraday; SS 304 Domestic Safe Sold Secure Silver level

Country of origin
Made in Germany

Installation
Easy mounting into 60cm kitchen cabinets

Operation
Simple, fast yet safe access by means of fingerprint sensor

Colour
Standard colour RAL 7016 anthracite

Standard inlay
Mat

PHYSICAL PROPERTIES

Overall packaging dimensions (WxDxH)
600 x 550 x 200 mm

Case dimensions (WxDxH)
551 x 493 x 125 mm

Wooden front dimensions (WxDxH)
560 x 10 x 134 mm

Support wooden guides (WxDxH)
380 x 2 x 130 mm

Drawer inner dimensions (WxDxH)
500 x 441 x 68 mm

Inner volume
15 litres

Case weight
19.5 kg

Drawer weight
7 kg

Front protection
New proprietary ACROBAT system (Anti-CROw-Bar-ATtack) in the front which provide the most efficient protection against front physical attacks in its category

MECHANICAL PROPERTIES & FUNCIONALITY

Soft close function
Yes (Blumotion)

Automatic lock when closing
Yes

Durability testing
over 25.000 life cycles (opening & closing)

Time to open
under 2 seconds

Runner System
Yes (Blum Movento)

ELECTRONICAL COMPONENTS & CONNECTIONS

Power lead to mains
230V/ 9v, 1,2m cord length, connected at bottom rear of case

Power plug
EU or UK

Fingerprint sensor
Capacitive sensor; IPx7

In the event of a power cut
9v battery can be connected for short time use at bottom of case by user, data is not erased

Reset function
Via software

SECURITY FEATURES

Safety standards
built to a EN 14450 – S1 standard; Sold Secure Silver level

Locks
Prime locks certified to ECB-S Class B and VDS Class 2

Faraday protection
protection against data theft at a distance > 10cm

Code and key encription
storage in a safe hardware unit (HSM)

Software & fingerprint sensor testing
Orange Cyberdefence in Malmö (Sweden)

Fire protection
No

APP FUNCTIONS & FEATURES

Connectivity
Wi-Fi and Bluetooth

Users per safe
1 app user per safe, up to 50 fingerprint users per safe

Alternative user interface
Yes

**User permission rights storage**
Yes

Users administration & monitoring
Yes

Factory default settings
Free opening by any fingerprint

Activity log
2 weeks activity log

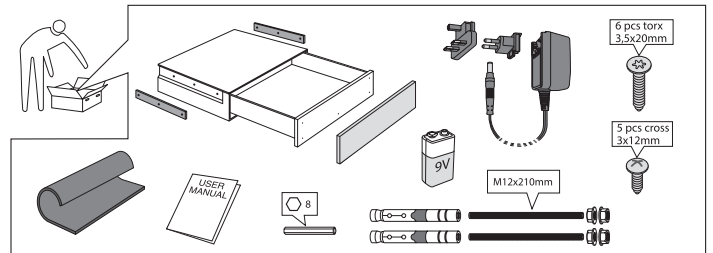## INSTALLATION OPTIONS

Single drawer undercounter

Drawer-in-drawer

The mounted wooden front is supposed to be flush-fitted with the cabinet

INSTALLATION STEPS

Unpacking
without turning box upside down, extract from the box, cutting the corners if needed
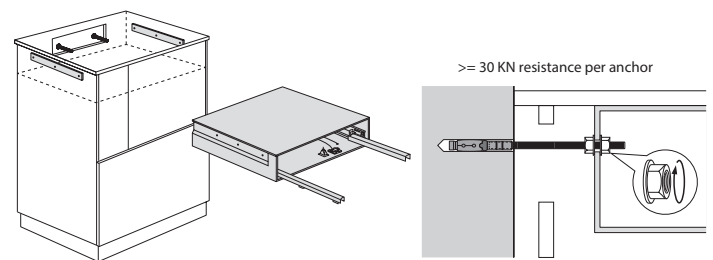

Preparing
place appliance on flat surface and extract drawer from case (2 people needed)

Drilling and anchoring to kitchen wall
via 2 12mm adjustable fixing bolts, once the case has been pushed onto the supports

>= 30 KN resistance per anchor

Connecting

BY **Gunnebo**®

Chubbsafes

Trusted the world over.